


CONT-TIME 2 INTEGRATOR LOOP

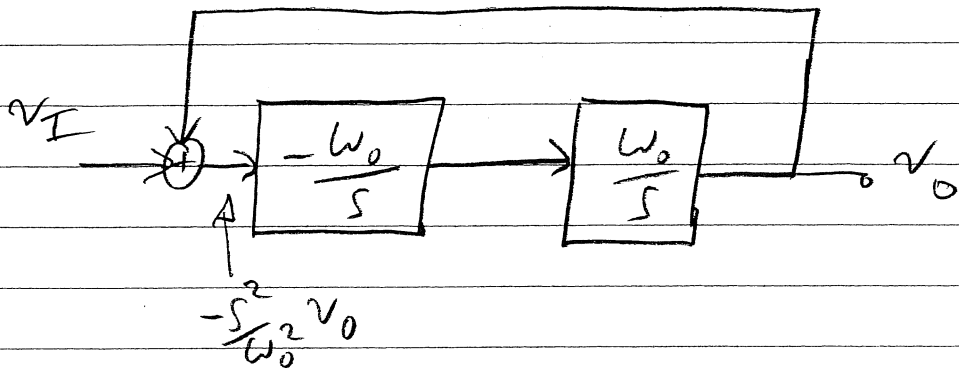


$$-\frac{s^2}{\omega_0^2} v_o = v_o + v_I$$

$$(s^2 + \omega_0^2) v_o = -\omega_0^2 v_I$$

$$\frac{v_o}{v_I} = \frac{-\omega_0^2}{s^2 + \omega_0^2}$$

POLES AT  $s^2 + \omega_0^2 = 0 \Rightarrow s = \pm j\omega_0$

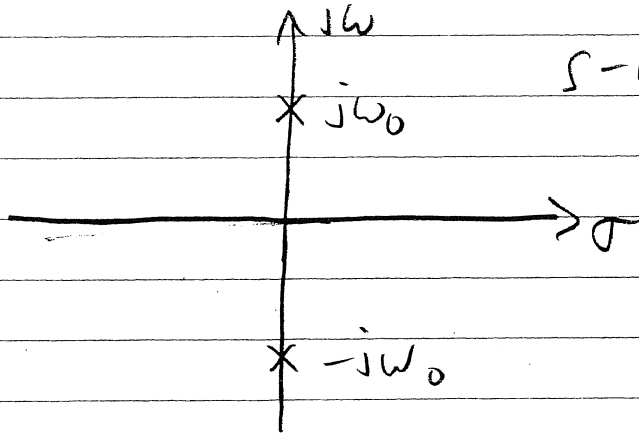


S-PLANE

POLES ON  
jw AXIS

Q -> infinity

## DISCRETE-TIME 2 INTEGRATOR LOOP

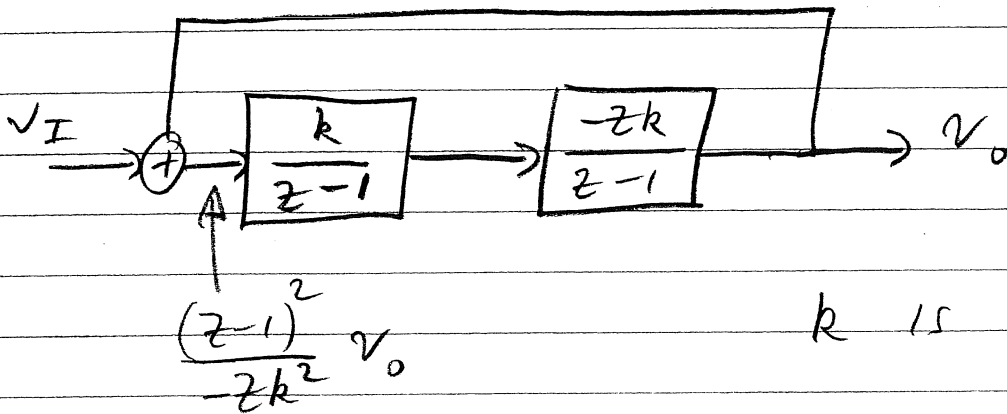

$$\frac{(z-1)^2}{-zk^2} v_o = v_o + v_I$$

$$(z-1)^2 v_o + zk^2 v_o = -zk^2 v_I$$

$$(z^2 + (k^2 - 2)z + 1)v_o = -zk^2 v_I$$

$$\frac{v_o}{v_I} = \frac{-zk^2}{z^2 + (k^2 - 2)z + 1}$$


POLES AT

$$z^2 + (k^2 - 2)z + 1 = 0$$

SOLVE FOR  $z_1, z_2 \Rightarrow$  CAN SHOW

$$\underline{\underline{|z_1| = |z_2| = 1}}$$

(L-3)

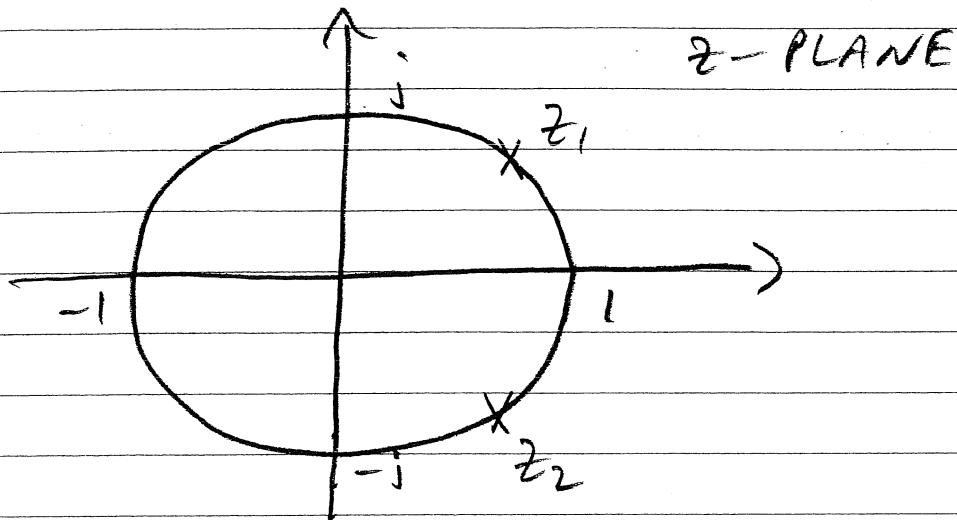

$z_1, z_2$  ALWAYS ON UNIT  
CIRCLE  $\Rightarrow$   $k$  ADJUSTS WHERE ON  
CIRCLE

L-4

WHY CARE?

IN CONT-TIME CASE, VARIATIONS

IN  $\omega_0$  ONLY MOVE POLES ALONG

$j\omega$  AXIS

IN DISCRETE-TIME CASE, VARIATIONS

IN  $R$  ONLY MOVE POLE AROUND UNIT  
CIRCLE

IN BOTH CASE, THIS RESULTS IN  
LESS SENSITIVITY FOR HIGH  $Q$

FILTERS.